

The wise choice



Micro-Tronics

for all your filter needs


Micro-Tronics is an operating division of O.M. Jones, Inc.

Telephone: 209-532-1008

Facsimile: 209-532-1009

e-mail: sales@micro-tronics.net

-Model BPM50603

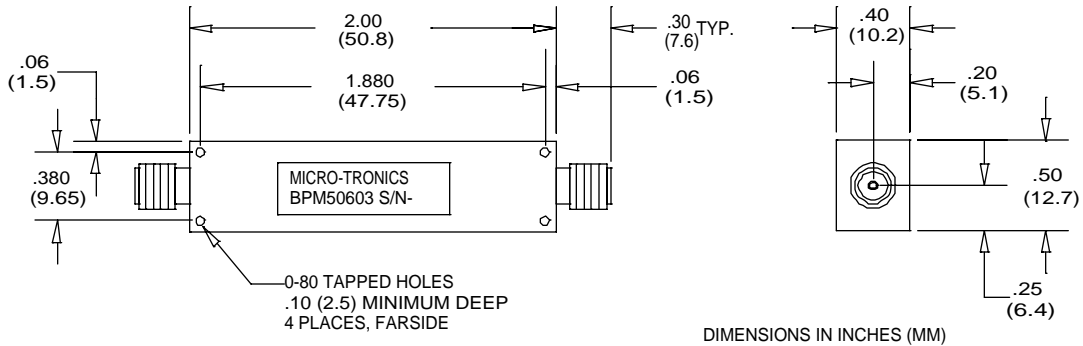

Micro-Tronics Model BPM50603 was specifically designed to pass 225 to 400 MHz while maintaining low insertion loss and sharp rejection. The basic bandpass filter design can also be adapted to custom applications.

| Specifications: | |
|--------------------------|---|
| Passband (MHz) | 225 to 400 |
| Passband Insertion Loss: | 1.5 dB maximum |
| Passband VSWR: | 1.5:1 maximum |
| Stopband: | 50 dB min from 0 to 175 and 475 to 2000 MHz |
| Operating Power: | 2W max |

Connectors:

Model #:

| | |
|--------------|-------------------------|
| BPM50603: | SMA Female – SMA Female |
| BPM50603-01: | SMA Male – SMA Female |
| BPM50603-02: | SMA Female – SMA Male |
| BPM50603-03: | SMA Male – SMA Male |